



PE DRAINAGE

PART OF MAIN FLOW CONTROL CATALOGUE



THE SMARTER CHOICE.

ASMUSS
STEEL & FLOW CONTROL

PE DRAINAGE



HDPE PIPING SYSTEM

The Geberit Polyethylene (PE) drainage system is ideally suited for use in a wide range of applications including: above and below ground drainage, normal and industrial waste and stormwater, as well as rainwater discharge inside domestic and industrial buildings.



Standards and Quality Marks

Geberit PE Drainage is produced in conformity with the unified standard EN 1519 and has Watermark License W210 under MP52 Spec 005: - Sanitary plumbing pipes and pipe fittings.

Benefits


- Quick and simple to install, via either butt welding or electrofusion welding
- Safe, secure and flexible
- Fewer blockages as PE's non-wettable surface resists build up and aids faster flow to reduce the likelihood of blockages
- High impact resistance, even at low temperatures
- Low noise transmission
- Wide temperature range
- Excellent abrasion resistance
- Good chemical resistance, please contact our sales team for suitability

Applications

A Geberit PE Drainage system is ideally suited to applications where high integrity is required:

- DWV services and ducts in and under buildings
- Industrial waste drainage
- Hot and cold waste lines
- Sewer or drain rehabilitation
- Where ground or structural movement could occur (e.g. earthquakes)
- Siphonic roof drainage systems
- "Greasy" tradewaste

For information relating to Siphonic drainage systems and Sovent ventilated stack systems please contact our sales team.

PE DRAINAGE PIPE				
	Code	Size OD (mm)	Wall Thickness (mm)	Internal Diameter (mm)
PE Drainage Pipe 5 Metre Lengths  *SDR26 rated	PPED/040	40	3	34
	PPED/050	50	3	44
	PPED/056	56	3	50
	PPED/063	63	3	57
	PPED/075	75	3	69
	PPED/090	90	3.5	83
	PPED/110	110	4.3	101.4
	PPED/125	125	4.9	115.2
	PPED/160	160	6.2	147.6
	*PPED/200	200	7.7	184.6
	*PPED/250	250	9.7	230.6
	*PPED/315	315	12.2	290.6
PE Drainage Pipe 5 Metre Lengths  SDR33 rated	PPED33/200	200	6.2	187.6
	PPED33/250	250	7.8	234.4
	PPED33/315	315	9.8	295.4

PE DRAINAGE



HDPE PIPING SYSTEM

PE DRAINAGE FITTINGS						
	Code	Size OD (mm)		Code	Size OD (mm)	
Electrofusion Coupler 	FPEDEC/040	40	Equal Tee 	FPEDT/040	40	
	FPEDEC/050	50		FPEDT/050	50	
	FPEDEC/056	56		FPEDT/056	56	
	FPEDEC/063	63		FPEDT/063	63	
	FPEDEC/075	75		FPEDT/075	75	
	FPEDEC/090	90		FPEDT/090	90	
	FPEDEC/110	110		FPEDT/110	110	
	FPEDEC/125	125		FPEDT/160	160	
	FPEDEC/160	160		FPEDT/200	200	
	FPEDEC/200	200		FPEDT/250	250	
	FPEDEC/250	250		FPEDT/315	315	
	FPEDEC/315	315				
	Elbow 45°  *Larger sizes prefabricated	FPEDEL45/040		40	Reducing Tee 	FPEDRT/050X040
FPEDEL45/050		50	FPEDRT/056X050	56 x 50		
FPEDEL45/056		56	FPEDRT/075X040	75 x 40		
FPEDEL45/063		63	FPEDRT/075X050	75 x 50		
FPEDEL45/075		75	FPEDRT/075X056	75 x 56		
FPEDEL45/090		90	FPEDRT/075X063	75 x 63		
FPEDEL45/110		110	FPEDRT/110X040	110 x 40		
FPEDEL45/125		125	FPEDRT/110X050	110 x 50		
FPEDEL45/160		160	FPEDRT/110X056	110 x 56		
FPEDEL45/200		200	FPEDRT/110X063	110 x 63		
*FPEDEL45/250		250	FPEDRT/110X075	110 x 75		
*FPEDEL45/315		315	FPEDRT/110X090	110 x 90		
Bend 88°  *Larger sizes prefabricated		FPEDEL88/040	40	FPEDRT/160X075		160 x 75
	FPEDEL88/050	50	FPEDRT/160X110	160 x 110		
	FPEDEL88/056	56	FPEDRT/200X110	200 x 110		
	FPEDEL88/063	63	FPEDRT/200X160	200 x 160		
	FPEDEL88/075	75	FPEDRT/250X110	250 x 110		
	FPEDEL88/090	90	FPEDRT/250X160	250 x 160		
	FPEDEL88/110	110	FPEDRT/315X160	315 x 160		
	FPEDEL88/125	125	FPEDRT/315X200	315 x 200		
	*FPEDEL88/160	160	FPEDRT/315X250	315 x 250		
	90° Bend Long Spigot  *Larger sizes prefabricated	FPEDB90LS/040	40	88.5° Swept Tee 	FPEDST/110x110	110
		FPEDB90LS/050	50			
		FPEDB90LS/056	56			
		FPEDB90LS/063	63			
FPEDB90LS/075		75				
FPEDB90LS/090		90				
FPEDB90LS/110		110				
90° Segmented Bend  *Prefabricated to order	*FPEDB90LS/160	160	Access Pipe With Screw Cap 88° 	FPEDAP/063	63	
				FPEDAP/075	75	
				FPEDAP/090	90	
				FPEDAP/110	110	
Stub Flange 	*FPEDEL90/200	200	FPEDAP/160	160		
	*FPEDEL90/250	250				
	*FPEDEL90/315	315				
			Access Pipe With Oval Cover 	FPEDAP/200	200	
				FPEDAP/250	250	
				FPEDAP/315	315	
			4 Way Riser 			
				FPED4WR/110X056	110/56	


Ball Chambers with 2, 3 or 4 branches - available on request

Ball Chambers with 2, 3 or 4 branches - available on request

PE DRAINAGE



HDPE PIPING SYSTEM



PE DRAINAGE FITTINGS					
	Code	Size OD (mm)			
Wye Junction 45°  *Larger sizes prefabricated	FPEDWYE/040	40	45° Double Branch 	FPEDDWYE/110X110	110 x 110
	FPEDWYE/050	50			
	FPEDWYE/056	56			
	FPEDWYE/063	63			
	FPEDWYE/075	75			
	FPEDWYE/090	90			
	FPEDWYE/110	110			
	FPEDWYE/125	125			
	FPEDWYE/160	160			
	*FPEDWYE/200	200			
Reducing Wye Junction 	*FPEDWYE/250	250	Eccentric Reducer 	FPEDER/050X040	50x40
	*FPEDWYE/315	315		FPEDER/056X040	56x40
	FPEDWYE/050X040	50 x 40		FPEDER/056X050	56x50
	FPEDWYE/056X050	56 x 50		FPEDER/063X050	63x50
	FPEDWYE/063X040	63 x 40		FPEDER/063X056	63x56
	FPEDWYE/063X050	63 x 50		FPEDER/075X040	75x40
	FPEDWYE/063X056	63 x 56		FPEDER/075X050	75x50
	FPEDWYE/075X040	75 x 40		FPEDER/075X056	75x56
	FPEDWYE/075X050	75 x 50		FPEDER/075X063	75x63
	FPEDWYE/075X056	75 x 56		FPEDER/090X050	90x50
	FPEDWYE/075X063	75 x 63		FPEDER/090X056	90x56
	FPEDWYE/090X040	90 x 40		FPEDER/090X063	90x63
	FPEDWYE/090X050	90 x 50		FPEDER/090X075	90x75
	FPEDWYE/090X056	90 x 56		FPEDER/110X040	110x40
	FPEDWYE/090X063	90 x 63		FPEDER/110X050	110x50
	FPEDWYE/090X075	90 x 75		FPEDER/110X056	110x56
	FPEDWYE/110X040	110 x 40		FPEDER/110X063	110x63
	FPEDWYE/110X050	110 x 50		FPEDER/110X075	110x75
	FPEDWYE/110X056	110 x 56		FPEDER/110X090	110x90
	FPEDWYE/110X075	110 x 75		FPEDER/125X050	125x50
	FPEDWYE/110X090	110 x 90		FPEDER/125X056	125x56
	FPEDWYE/125X063	125 x 63		FPEDER/125X063	125x63
	FPEDWYE/125X075	125 x 75		FPEDER/125X075	125x75
	FPEDWYE/125X090	125 x 90		FPEDER/125X090	125x90
	FPEDWYE/125X110	125 x 110		FPEDER/125X110	125x110
	FPEDWYE/160X075	160 x 75		FPEDER/160X110	160x110
	FPEDWYE/160X090	160 x 90		FPEDER/160X125	160x125
	FPEDWYE/160X110	160 x 110		FPEDERLS/200X110	200x110
	FPEDWYE/160X125	160 x 125		FPEDERLS/200X125	200x125
	*FPEDWYE/200X110	200 x 110		FPEDERLS/200X160	200x160
	*FPEDWYE/200X125	200 x 125		FPEDERLS/250X200	250x200
	*FPEDWYE/200X160	200 x 160		FPEDERLS/315X200	315x200
	*FPEDWYE/250X110	250 x 110		FPEDERLS/315X250	315x250
	*FPEDWYE/250X160	250 x 160			
	*FPEDWYE/250X200	250 x 200			
	*FPEDWYE/315X110	315 x 110			
	*FPEDWYE/315X160	315 x 160			
	*FPEDWYE/315X200	315 x 200			
	*FPEDWYE/315X250	315 x 250			
Loose Nut Threaded Adaptor 	FPEDLNUT/050X11/2	50 x 1½"	Male Threaded Adaptor 	FPEDMA/050X11/2	50x1½"
	FPEDLNUT/050X2	50 x 2"		FPEDMA/056X2	56x2"
Female Threaded Adaptor 				FPEDMA/063X2	63x2"
				FPEDMA/075X21/2	75x2½"
				FPEDFA/040X1	40x1"
				FPEDFA/050X11/2	50x1½"
				FPEDFA/056X2	56x2"
				FPEDFA/063X2	63x2"
				FPEDFA/075X21/2	75x2½"

PE DRAINAGE




HDPE PIPING SYSTEM

PE DRAINAGE FITTINGS

	Code	Size OD (mm)
Pan Connector 	FPEDPC/110	110 x 135 Rubber
Screwed End Cap 	FPEDSEC/040	40
	FPEDSEC/050	50
	FPEDSEC/056	56
	FPEDSEC/060	63
	FPEDSEC/070	75
	FPEDSEC/090	90
	FPEDSEC/110	110
Long Spigot Screwed End Cap	FPEDSECLS/056	56
	FPEDSECLS/075	75
	FPEDSECLS/090	90
S Trap 	FPEDSTRAP/050X050	50
	FPEDSTRAP/050X056	50x56
P Trap 	FPEDPTRAP/050X050	50
	FPEDPTRAP/050X056	50x56
P Trap - Short Fixed 	FPEDSPT/050	50
	FPEDSPT/056	56
	FPEDSPT/063	63
	FPEDSPT/075	75
	FPEDSPT/090	90
	FPEDSPT/110	110
	FPEDSPT/160	160
Note: Other P Trap sizes also available		
P Trap - Long Fixed 	FPEDLPT/050	50
	FPEDLPT/056	56
	FPEDLPT/063	63
	FPEDLPT/075	75
	FPEDLPT/090	90
	FPEDLPT/110	110
	FPEDLPT/160	160
Note: Other P Trap sizes also available		
P Trap Short Adjustable 	FPEDAPT/110	110
Note: Other P Trap sizes also available		

Adaptors from 50, 56, 63mm HDPE to the fixture trap or tundish

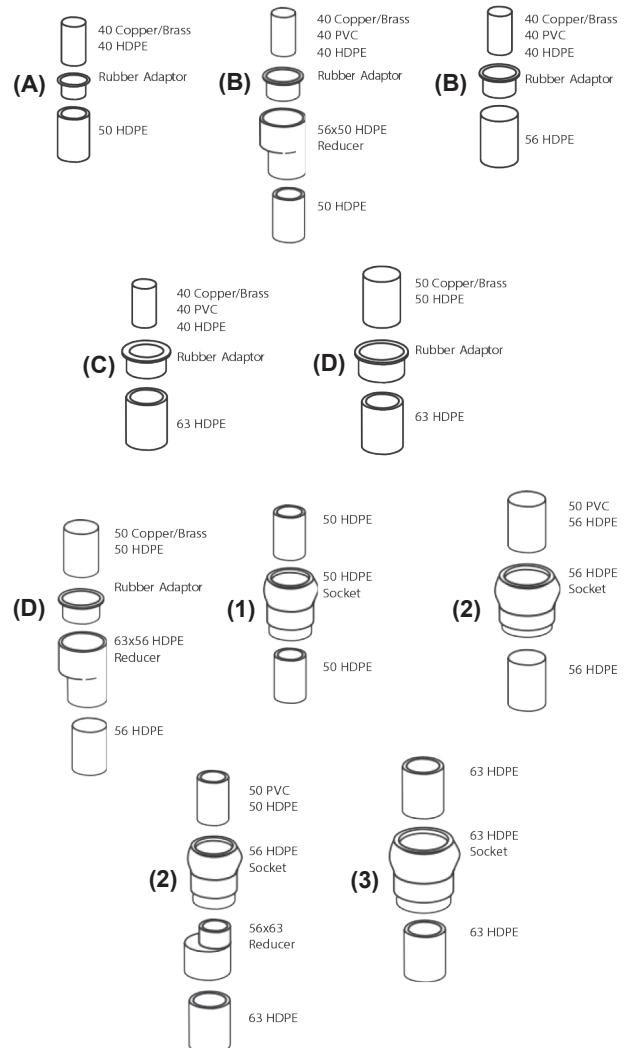

Reduce pipe > 63mm using PE eccentric reducer then adaptors from above

KEY	Code	Size OD (mm)
(A)	FPEDRTA/050X040	50 x 40
(B)	FPEDRTA/056X040	56 x 40
(C)	FPEDRTA/063X040	63 x 40
(D)	FPEDRTA/063X050	63 x 50
(Butt Weld only)		
(1)	FPEDRRJ/050	50
(2)	FPEDRRJ/056	56
(3)	FPEDRRJ/063	63
OR Long Spigot for EF		
(1)	FPEDRRJLS/050	50
(2)	FPEDRRJLS/056	56
(63mm not available)		

PE DRAINAGE




HDPE PIPING SYSTEM

PE DRAINAGE FITTINGS

Due to its high capacity and excellent performance Geberit Sovent is an ideal drainage system for:

- High-rise office buildings
- Hotels
- Multi-storey residential buildings

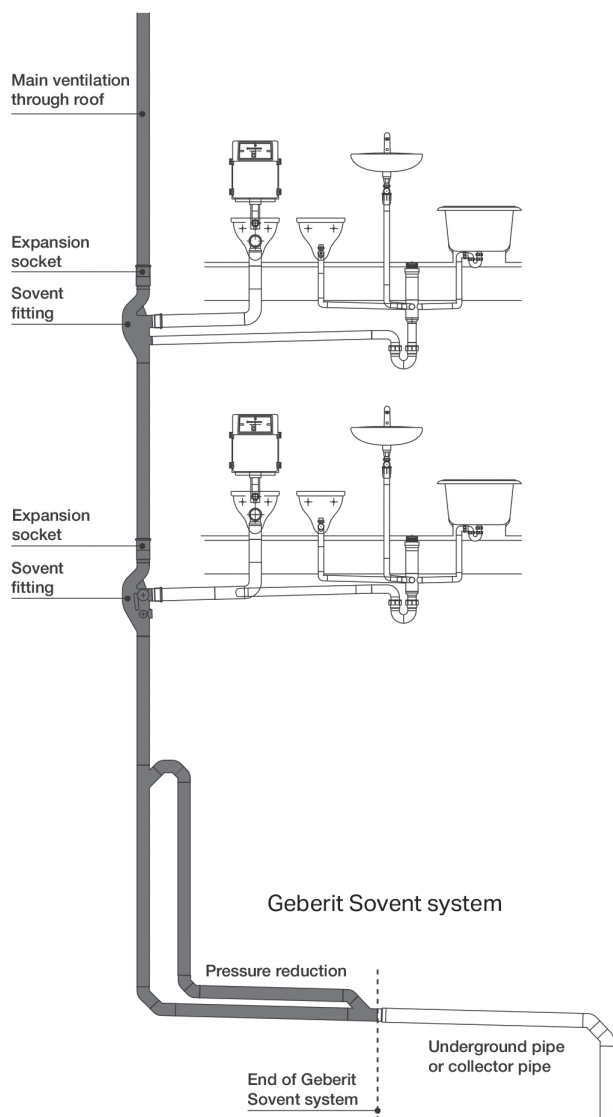

Why is Geberit Sovent a better solution?

There is a simple answer to that:


- Better performance, less space, labour and material cost

Better performance.

In comparison with conventional systems, Geberit Sovent:

- Reduces the pneumatic and hydraulic pressure
- Offers versatile branch joining possibilities
- Reduces stack sizes with the same loading capacities as a secondary ventilated system
- Saves space

Sovent Ventilation Branch

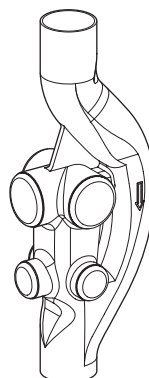

FPEDVBHF/110	110
FPEDVB/160	160

- Pre-fabricated ventilation branches offered to reduce In-situ welding and costs
- More than one PE/PVC ring seal adaptor: can be welded to a ventilation branch
- Off take locations and orientation to be confirmed at time of order

Expansion Joint



FPEDEJ/050	50
FPEDEJ/056	56
FPEDEJ/063	63
FPEDEJ/075	75
FPEDEJ/090	90
FPEDEJ/110	110
FPEDEJ/125	125
FPEDEJ/160	160
FPEDEJ/200	200
FPEDEJ/250	250
FPEDEJ/315	315

Ring Seal Adaptor




Long spigot will suit butt weld & EF

FPEDRRJ/040	40
FPEDRRJ/050	50
FPEDRRJ/056	56
FPEDRRJ/063	63
FPEDRRJ/075	75
FPEDRRJ/090	90
FPEDRRJ/110	110
FPEDRRJ/160	160
FPEDSLAB/110	110

PE Slab Adaptor



Long Spigot Weld On End Cap



FPEDWECLS/050	50
FPEDWECLS/056	56
FPEDWECLS/075	75
FPEDWECLS/090	90
FPEDWECLS/110	110
FPEDWECLS/160	160
FPEDWECLS/110	110
FPEDWECLS/160	160
FPEDWECLS/200	200
FPEDWECLS/250	250
FPEDWECLS/315	315

EF (Anchor) Tape

FPEDFTAPE/110	110
FPEDFTAPE/160	160
FPEDFTAPE/200	200
FPEDFTAPE/250	250
FPEDFTAPE/315	315

Open Weave Cloth

FPEDOC	
GEBERITESG3	40 - 315

Electrofusion Control Unit
Welds 3 joints at one time (up to 110mm)

PE Drainage Tooling and Accessories are also available. Please refer to our Machines and Tooling Catalogue.

PE DRAINAGE



HDPE PIPING SYSTEM

GEBERIT PLUVIA SIPHONIC ROOF DRAINAGE SYSTEM

Double the amount of rainwater discharge.

Half the pipe diameter.

Geberit Pluvia outlets have been specially constructed to ensure rapid removal of rainwater from the roof using siphonic principles with a vacuum effect.

Greater installation flexibility.

The Pluvia system is simpler because


no slopes are required for horizontal pipe runs, reducing ceiling space. Smaller pipe diameters can lead to lower material cost and greater installation flexibility.

Service and support.


Geberit offers a comprehensive service package for customers from training to

designing and onsite technical support. Fully accredited, our staff are able to assist consultants with the design of the Pluvia roof drainage system.


Advantages of Geberit Pluvia over conventional roof drainage systems

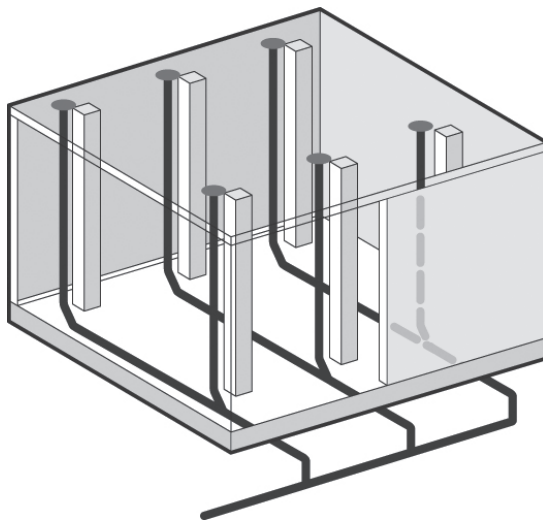

- Many roof outlets
- Pipe laying necessary on a slope
- Many stacks
- Complicated underground pipes
- Large pipe dimensions

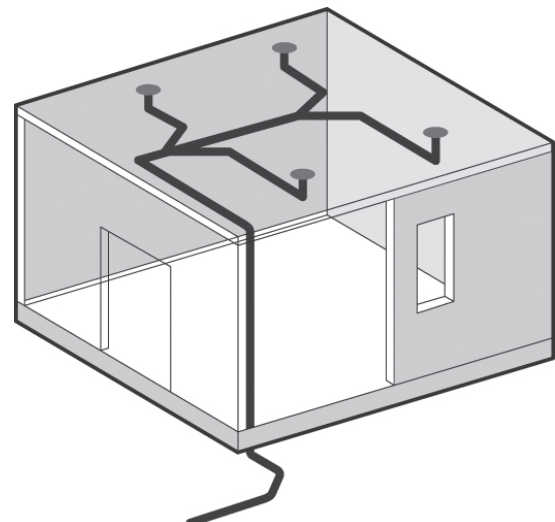

- Fewer roof outlets due to the high drainage capacity per roof outlet
- Space savings
- Reduced construction effort
- Smaller pipe dimensions
- Self-cleaning of the pipes due to high flow speeds
- Architectural freedom

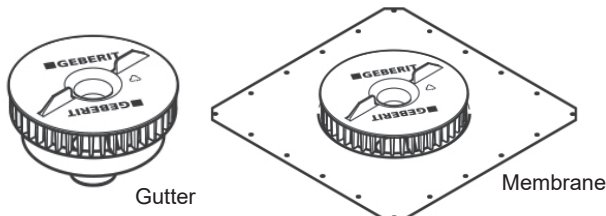

Roof outlets are a key component of a siphonic roof drainage system. Geberit roof outlets are available in gutter and membrane styles. Various sizes are available.

Roof outlets are not sold individually as they are supplied as part of the total siphonic system.

Each siphonic system is custom designed to suit individual buildings and roofs and the required ARI.

Siphonic roof drainage systems are quoted as a lump sum, and must be ordered as a package.

Pipework Support:

It is recommended that Geberit siphonic roof drainage systems are installed using a suspension rail system and appropriate pipe clamps. Anchor brackets (fixed points) must be provided when the pipeline changes orientation and also to control expansion and contraction.

Please enquire about pipe clamps designed to be used with the EF (anchor) tape listed below.



ASMUSS

STEEL & FLOW CONTROL

AUCKLAND

34 Arrenway Drive
Albany
Auckland 0632
PH +64 9 477 2320

KAWERAU

KEA 2 Industrial Park
Manukorihi Drive
Kawerau 3127
PH +64 7 323 6198

TAUPO

464 Rakaunui Road
Rotokawa
Taupo 3378
PH +64 7 377 8416

CHRISTCHURCH

60 - 70 Detroit Drive
Rolleston
Christchurch 7614
PH +64 3 347 1568

6 Gabador Place
Mount Wellington
Auckland 1060
PH +64 9 573 0002

WELLINGTON

11-13 Gough Street
Lower Hutt
Wellington 5010
PH +64 4 939 6699

NEW PLYMOUTH

82 De Havilland Drive
Bell Block
New Plymouth 4312
PH +64 6 755 2570

5 Paradyne Place,
Wigram,
Christchurch 8042
PH +64 3 348 4087

DRURY DC

17 Ross Stevenson Road
Drury
Auckland 2579

TAURANGA

40 Portside Drive
Mt Maunganui
Tauranga 3116
PH +64 7 574 6774

NELSON

8 Saxton Road West
Stoke
Nelson 7011
PH +64 3 538 0351

DUNEDIN

3 White Street
Dunedin Central
Dunedin 9016
PH +64 3 477 2323

WAIKATO

40 Bryant Road
Te Rapa
Hamilton 3200
PH +64 7 849 2410

FLOWCONTROL@ASMUSS.CO.NZ

WWW.ASMUSS.CO.NZ