



VARIABLE AREA FLOW METERS

PART OF MAIN FLOW CONTROL CATALOGUE



ASMUSS
STEEL & FLOW CONTROL

THE SMARTER CHOICE.

+GF+ VARIABLE AREA FLOW METERS

FOR SIMPLE AND ACCURATE MEASUREMENT OF FLUIDS & GASES

Pressure range

Nominal pressure 10 bar at 20 °C

Materials

Tube: Polyamid, Polysulphone, PVDF and PVC-U transparent
 Float: PVDF, PTFE
 End stops: PVDF
 Screw connection: PVC-U (PP, PVDF, ABS)
 O-ring: EPDM (FPM)
 Guiding rod: Peek

Calibrated scales

The standard version comes with a printed on double scale: a percentage scale and a scale giving flow rate (H2O l/h).

The special scales come as a sticker and need to be fitted to a blank taper tube. The scales are adhesive bonded to the tube and are printed with a special hard wearing paint.

Standard scale:

l/h

Special scales:

m³/h, GPM

Scales for other liquids:

HCl 30-33%, NaOH 30%, Na-OH 50% and air



Related Documents

Variable Area Flow Meter Technical & Installation Guide

CHEMICAL RESISTANCE LIST								
	Chemical			PVC-U	Trogamid	PSU	PVDF	Peek
Acid	phosphoric acid	H3PO4	75%	X	O	X	X	X
	sulfuric acid	H2SO4	<90%	X	-	-	X	-
	nitric acid	HNO3	<55%	X	-	-	X	-
	nitric acid	HNO3	67%	-	-	-	X	-
	hydrofluoric acid	HF	<70%	X	-	-	X	-
	hydrochloric acid	HCl	36%	X	O	X	X	O
Base	ammtonia	NH4OH	25%	X	X	X	-	X
	caustic potash	KOH	>50%	X	O	X	-	X
	caustic soda	NaOH	<50%	X	O	X	-	X
Anorganica	ferric chloride	FeCl3	X	X	X	X	X	
	sodium hydrochloride	NaOCl	15%	X	X	X	-	X
	sodium bisulfite	NaHSO3	<40%	X	X	X	X	X
	hydrogen peroxide	H2O2	35%	X	-	X	O	X
	aqueaous inorganic sline solutions (not oxidizing)	til saturation		X	X	X	X	X
Organica	formic acid	HCOOH	85%	O	-	O	O	O
	acetic acid	CH3COOH	85%	O	-	O	O	O
	formaldehyde	H2CO	<40%	X	-	X	O	X
	glycol		<50%	O	-	X	X	X
	acetone	undiluted		-	O	-	O	X
	ethanol, methanol	undiluted		O	-	X	X	X
	aliphatic hydrocarbons	undiluted		O	X	X	X	X

Valid for 40°C and 2bar

X: recommended

O: with limitations

-: not recommended


For higher or lower concentrations than mentioned in the list or entry "O", please contact our sales team

+GF+ VARIABLE AREA FLOW METERS

FOR SIMPLE AND ACCURATE MEASUREMENT OF FLUIDS & GASES

335 SERIES VARIABLE AREA FLOW METERS

	Code	Range (Ltr / hr)	Size (NB)			Code	Range (Ltr / hr)	Size (NB)
Type 335, PVC Without Magnet	VGf335000	50-500	25	Type 335, PSU Without Magnet	VGfPSU335040	50-500	25	
	VGf335001	100-1000	25		VGfPSU335041	100-1000	25	
	VGf335002	150-1500	32		VGfPSU335042	150-1500	32	
	VGf335003	250-2500	32		VGfPSU335043	250-2500	32	
	VGf335004	200-2000	40		VGfPSU335044	200-2000	40	
	VGf335005	300-3000	40		VGfPSU335045	300-3000	40	
	VGf335006	600-6000	40		VGfPSU335046	600-6000	40	
	VGf335007	600-6000	50		VGfPSU335047	600-6000	50	
	VGf335008	1000-10000	50		VGfPSU335048	1000-10000	50	
	VGf335009	1500-15000	50		VGfPSU335049	1500-15000	50	
	VGf335010	2000-20000	65		VGfPSU335050	2000-20000	65	
	VGf335011	3000-30000	65		VGfPSU335051	3000-30000	65	
Type 335, PVC With Magnet	VGf335012	8000-60000	65		VGfPSU335052	8000-60000	65	
	VGf335100M	50-500	25	Type 335, PSU With Magnet	VGfPSU335140M	50-500	25	
	VGf335101M	100-1000	25		VGfPSU335141M	100-1000	25	
	VGf335102M	150-1500	32		VGfPSU335142M	150-1500	32	
	VGf335103M	250-2500	32		VGfPSU335143M	250-2500	32	
	VGf335104M	200-2000	40		VGfPSU335144M	200-2000	40	
	VGf335105M	300-3000	40		VGfPSU335145M	300-3000	40	
	VGf335106M	600-6000	40		VGfPSU335146M	600-6000	40	
	VGf335107M	600-6000	50		VGfPSU335147M	600-6000	50	
	VGf335108M	1000-10000	50		VGfPSU335148M	1000-10000	50	
	VGf335109M	1500-15000	50		VGfPSU335149M	1500-15000	50	
	VGf335110M	2000-20000	65		VGfPSU335150M	2000-20000	65	
	VGf335111M	3000-30000	65		VGfPSU335151M	3000-30000	65	
	VGf335112M	8000-60000	65		VGfPSU335152M	8000-60000	65	

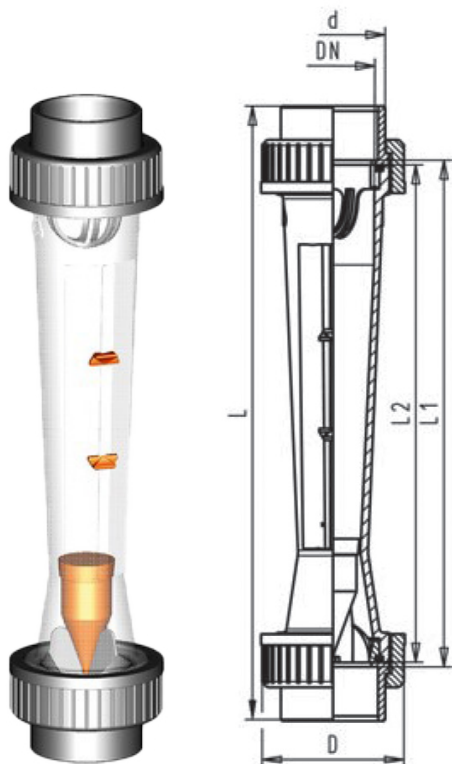

Range (Ltr / hr)	D (mm)	L (mm)	L1 (mm)	L2 (mm)	G (inch)
50-500	58	385	341	335	1½
100-1000	58	385	341	335	1½
150-1500	72	393	341	335	2
250-2500	72	393	341	335	2
200-2000	83	403	341	335	2¼
300-3000	83	403	341	335	2¼
600-6000	83	403	341	335	2¼
600-6000	101	417	341	335	2¾
1000-10000	101	417	341	335	2¾
1500-15000	101	417	341	335	2¾
2000-20000	135	429	341	335	3½
3000-30000	135	429	341	335	3½
8000-60000	135	429	341	335	3½


PVDF and Trogamid (Polyamid) Options available on request

+GF+ VARIABLE AREA FLOW METERS

FOR SIMPLE AND ACCURATE MEASUREMENT OF FLUIDS & GASES



SHORT VERSION VARIABLE AREA FLOW METERS

	Code	Range (Ltr / hr)	Size (NB)			Code	Range (Ltr / hr)	Size (NB)
Short Version PVC Without Magnet	SKPVC50/010	2.5-25	10	Short Version PSU Without Magnet	SKPSU50/010	2.5-25	10	
	SKPVC51/010	5-50	10		SKPSU51/010	5-50	10	
	SKPVC52/010	10-100	10		SKPSU52/010	10-100	10	
	SKPVC60/015	8-80	15		SKPSU60/015	8-80	15	
	SKPVC61/015	15-150	15		SKPSU61/015	15-150	15	
	SKPVC62/015	20-200	15		SKPSU62/015	20-200	15	
	SKPVC70/025	15-150	25		SKPSU70/025	15-150	25	
	SKPVC71/025	30-300	25		SKPSU71/025	30-300	25	
	SKPVC72/025	50-500	25		SKPSU72/025	50-500	25	
	SKPVC73/025	100-1000	25		SKPSU73/025	100-1000	25	
Short Version PVC With Magnet	SKPVC500/010	2.5-25	10	Short Version PSU With Magnet	SKPSU500/010	2.5-25	10	
	SKPVC510/010	5-50	10		SKPSU510/010	5-50	10	
	SKPVC520/010	10-100	10		SKPSU520/010	10-100	10	
	SKPVC600/015	8-80	15		SKPSU600/015	8-80	15	
	SKPVC610/015	15-150	15		SKPSU610/015	15-150	15	
	SKPVC620/015	20-200	15		SKPSU620/015	20-200	15	
	SKPVC700/025	15-150	25		SKPSU700/025	15-150	25	
	SKPVC710/025	30-300	25		SKPSU710/025	30-300	25	
	SKPVC720/025	50-500	25		SKPSU720/025	50-500	25	
	SKPVC730/025	100-1000	25		SKPSU730/025	100-1000	25	

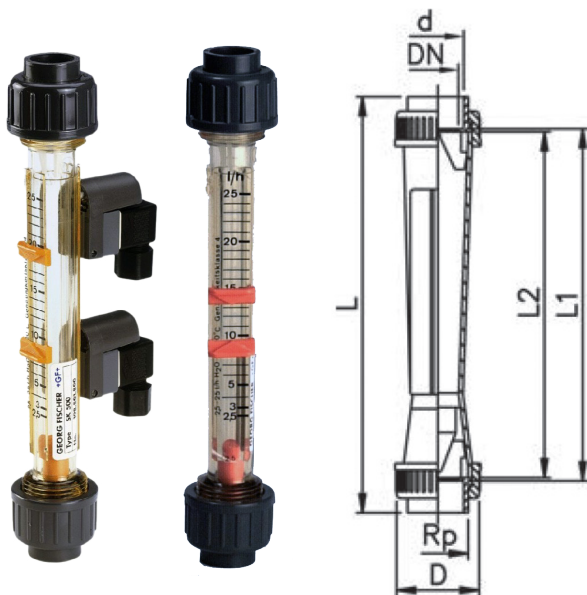

Range (Ltr / hr)	D (mm)	L (mm)	L1 (mm)	L2 (mm)	Rp (inch)
2.5-25	35	199	171	165	3/8
5-50	35	199	171	165	3/8
10-100	35	199	171	165	3/8
8-80	43	223	191	185	1/2
15-150	43	223	191	185	1/2
20-200	43	223	191	185	1/2
15-150	60	250	206	200	1
30-300	60	250	206	200	1
50-500	60	250	206	200	1
100-1000	60	250	206	200	1

LIMIT SWITCHES FOR TYPE 335, 350 AND SHORT VERSION

	Code	Type		Code	Type
Limit Contact Minimum	VAGK10	min	Limit Contact Maximum	VAGK11	max
					

Please refer to our Installation Guide



ASMUSS

STEEL & FLOW CONTROL

AUCKLAND

34 Arrenway Drive
Albany
Auckland 0632
PH +64 9 477 2320

KAWERAU

KEA 2 Industrial Park
Manukorihi Drive
Kawerau 3127
PH +64 7 323 6198

TAUPO

464 Rakaunui Road
Rotokawa
Taupo 3378
PH +64 7 377 8416

CHRISTCHURCH

60 - 70 Detroit Drive
Rolleston
Christchurch 7614
PH +64 3 347 1568

6 Gabador Place
Mount Wellington
Auckland 1060
PH +64 9 573 0002

WELLINGTON

11-13 Gough Street
Lower Hutt
Wellington 5010
PH +64 4 939 6699

NEW PLYMOUTH

82 De Havilland Drive
Bell Block
New Plymouth 4312
PH +64 6 755 2570

5 Paradyne Place,
Wigram,
Christchurch 8042
PH +64 3 348 4087

DRURY DC

17 Ross Stevenson Road
Drury
Auckland 2579

TAURANGA

40 Portside Drive
Mt Maunganui
Tauranga 3116
PH +64 7 574 6774

NELSON

8 Saxton Road West
Stoke
Nelson 7011
PH +64 3 538 0351

DUNEDIN

3 White Street
Dunedin Central
Dunedin 9016
PH +64 3 477 2323

WAIKATO

40 Bryant Road
Te Rapa
Hamilton 3200
PH +64 7 849 2410

FLOWCONTROL@ASMUSS.CO.NZ
WWW.ASMUSS.CO.NZ