

ACTUATED VALVES ELECTRIC

PART OF MAIN FLOW CONTROL CATALOGUE



ASMUSS
STEEL & FLOW CONTROL



THE SMARTER CHOICE.

THE SMARTER CHOICE.

+GF+ ELECTRICALLY ACTUATED VALVES

FOR CHEMICAL PROCESS APPLICATIONS


EA 546 STANDARD ELECTRIC ACTUATOR ASSEMBLY

		Code	Size (NB)			Code	Size (NB)
	EA15 230 VOLT	EA15546-230V/015	15mm		EA15 24 VOLT (AC or DC)	EA15546-24V/15	15mm
		EA15546-230V/20-25	20-25mm			EA15546-24V/20-25	20-25mm
		EA15546-230V/32-40	32-40mm			EA15546-24V/32-40	32-40mm
		EA15546-230V/50	50mm			EA15546-24V/50	50mm
	EA25 230 VOLT	EA25546-230V/15	15mm		EA25 24 VOLT (AC or DC)	EA25546-24V/15	15mm
		EA25546-230V/20-25	20-25mm			EA25546-24V/20-25	20-25mm
		EA25546-230V/32-40	32-40mm			EA25546-24V/32-40	32-40mm
		EA25546-230V/50	50mm			EA25546-24V/50	50mm
	EA45/120 230 VOLT	EA120546-230V/065	65mm		EA45/120 24 VOLT (AC or DC)	EA45546-24V/65	65mm
		EA120546-230V/080	80mm			EA120546-24V/80	80mm
		EA120546-230V/100	100mm			EA120546-24V/100	100mm

Includes EA15/25/45/120 Actuator, Drive Adaptors and Multifunction unit used for the 546 Ball Valves.

VALVE IS NOT INCLUDED



EA 543 STANDARD ELECTRIC ACTUATOR ASSEMBLY

	Code	Size (NB)		Code	Size (NB)
	EA25543-230V/15	15mm		EA25543-24V/15	15mm
	EA25543-230V/20-25	20-25mm		EA25543-24V/20-25	20-25mm
	EA25543-230V/32-40	32-40mm		EA25543-24V/32-40	32-40mm
	EA25543-230V/50	50mm		EA25543-24V/50	50mm

Includes EA25 Actuator and Multifunction unit to assemble the 543 3Way Ball Valves up to 50mm.

VALVE IS NOT INCLUDED

EA 567 STANDARD ELECTRIC ACTUATOR ASSEMBLY

	Code	Size (NB)		Code	Size (NB)
	EA45567-230V/50-65	50-65mm		EA45567-24V/50-65	50-65mm
	EA120567-230V/80	80mm		EA120567-24V/80	80mm
	EA120567-230V/100-125	100-125mm		EA120567-24V/100-125	100-125mm
	EA250567-230V/150	150mm		EA250567-24V/150	150mm

Includes EA45/120 Actuator and Adaptor to assemble the 567 Valves up to 200mm.

VALVE IS NOT INCLUDED

SMART ELECTRIC ACTUATORS TYPE DEA25-250

The smart electric actuator is the first product that can be controlled fully by an app. Furthermore it is not only smart and excellently equipped, it also features very high peak torques ranging from 25 Nm to 250 Nm. Therefore, it is able to automate a wide range of valves.

The actuators can be installed on any common valves with interface according to ISO 5211.

Accessories allow using them not only as an on/off actuator but also in continuous operation.



E-DIASTAR FOR TYPES 514, 515 AND 517

The e-DIASTAR system is based on the diaphragm Valve Type 514 (threaded sockets) and Type 515 (spigots), on which the electric actuator EA-MT is mounted. The diaphragm Valve Type 517 (flange) can be retrofitted after installation. The electric actuator EA-MT opens and closes the diaphragm valve fully automatic.

The e-DIASTAR is used to regulate, close and control volume flows automatically. Especially when transporting contaminated, aggressive or abrasive media, this type of valve has decisive advantages thanks to its simple function and optimized construction. Only the valve body and the replaceable diaphragm are in contact with the medium.



+GF+ ELECTRICALLY ACTUATED VALVES

FOR CHEMICAL PROCESS APPLICATIONS

AsmuSS build in-house actuation assemblies and can customise to meet your exacting needs, including a wide range of additional accessories. For ease of pricing and ordering we have created a basic actuator assembly kit featuring the appropriate actuator and the adaptor parts to assemble and test a complete actuated valve.

All you have to do is select the assembly and add the valve from our manual price list to get your pricing and for ordering purposes. If you require additional functionality, please contact our office.

ELECTRIC ACTUATION

The +GF+ Electric Actuators type EA15, EA25, EA45, EA120 and EA250 are not only well equipped, they are also characterized by very high peak torques from 25 Nm to 250 Nm making them able to automate a wide range of valves. The electric actuators serve to operate valves with a rotating angle of 90° to 180°. The actuators can be installed on any common valves with inter-faces according to ISO 5211. Accessories are available to operate valves in continuous operation.



Features:

- LED Feedback - Reading of the actuator position as well under difficult light conditions
- Integrated feedback
- Electric position feedback for position Open/Close/Middle
- Integrated heater with dial for temperature
- 7-Segment error display
- Position sensor with easy re-adjustment teach-buttons to manually reset open and closed position
- Profibus DP-V0 compatible
- Simple selection and assembly of accessory parts

Related Documents:

- Manual Valves Price List
- GF EA 15-250 Electric Actuator Handbook

EA15, EA25, EA45, EA120, EA250	
Nominal Voltage	AC:100-230V, AC/DC: 24V, 50/60 Hz
Nominal Voltage Tolerance	+ /- 15%
Protection class	IP 65 according to EN60529
Pollution degree	2 according to EN61010-1
Overload protection	Current/time dependent, resetting
Over voltage category	II
Ambient temperature	-10 - +50 deg C
Allowable humidity	Max 90 % relative humidity, non-condensing
Housing material	GF PP for Chemical Resistance

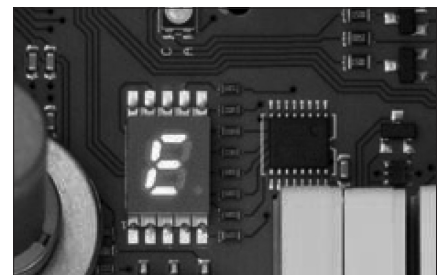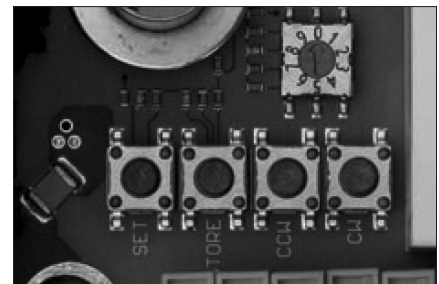

	EA15	EA25	EA45	EA120	EA250
Power input max.*	45VA	50VA	70VA	65VA	75VA
Nominal Torque Mdn (peak)	10(20)Nm	10(25)Nm	20(45)Nm	60(120)Nm	100(250)Nm
Duty Cycle	40% @ 25° C/15min	100%	50%	50%	50%
Cycle times/90 deg at Mdn	5 s	5 s	6 s	15 s	20 s
Flange Fittings (Mounting Plate)	F05	F05	F05	F07	F07
Tested cycles (at 20deg C & Mdn)	150 000	250 000	100 000	100 000	75 000
Weight	1.9 kg	2.1 kg	2.2 kg	3.3 kg	5.0 kg
Actuating Angle	Max.355° set to 90°				
Power Supply	AC:100 - 230 V, 50/60 Hz				
	AC/DC: 24 V, 50/60 Hz				



ASMUSS

STEEL & FLOW CONTROL

AUCKLAND

34 Arrenway Drive
Albany
Auckland 0632
PH +64 9 477 2320

KAWERAU

KEA 2 Industrial Park
Manukorihi Drive
Kawerau 3127
PH +64 7 323 6198

TAUPO

464 Rakaunui Road
Rotokawa
Taupo 3378
PH +64 7 377 8416

CHRISTCHURCH

60 - 70 Detroit Drive
Rolleston
Christchurch 7614
PH +64 3 347 1568

6 Gabador Place
Mount Wellington
Auckland 1060
PH +64 9 573 0002

WELLINGTON

11-13 Gough Street
Lower Hutt
Wellington 5010
PH +64 4 939 6699

NEW PLYMOUTH

82 De Havilland Drive
Bell Block
New Plymouth 4312
PH +64 6 755 2570

5 Paradyne Place,
Wigram,
Christchurch 8042
PH +64 3 348 4087

DRURY DC

17 Ross Stevenson Road
Drury
Auckland 2579

TAURANGA

40 Portside Drive
Mt Maunganui
Tauranga 3116
PH +64 7 574 6774

NELSON

8 Saxton Road West
Stoke
Nelson 7011
PH +64 3 538 0351

DUNEDIN

3 White Street
Dunedin Central
Dunedin 9016
PH +64 3 477 2323

WAIKATO

40 Bryant Road
Te Rapa
Hamilton 3200
PH +64 7 849 2410

FLOWCONTROL@ASMUSS.CO.NZ

WWW.ASMUSS.CO.NZ